



POLYURETHANE RUBBER

Liquid polyurethane rubber is a time-tested material for making durable molds and parts when a detailed shape, contour, or curve is desired. For concrete casting, it outperforms most other molding materials because of its ability to copy and reproduce fine details. VFI's pourable urethane rubbers are very versatile, with premium properties and varying speeds to fit any processing needs. We also offer a Max Release series of rubbers that have release properties similar to a silicone rubber. These rubbers offer lower breakage rates between 2-3%.

TDI-based rubbers are the preferred option for molding and casting due to their low moisture sensitivity, low exothermic reaction, extended pot life, and longer life span. These products have been used to produce architectural cast stone, concrete stamps and formliners, manufactured stone veneers, and more.

VFI also offers a full line of MDI-based liquid urethane rubber for high volume producers with varying properties, pot lives, and demold times.

FEATURES & BENEFITS


- Superior physical properties ideal for urethane rubber mold making
- Improved strength for better abrasion resistance and longer lasting molds
- Captures excellent detail and texture for higher quality, repeated results
- Outperforms when casting pigmented and colored concrete
- Increased rebound properties promote easier demolding
- Decreased moisture sensitivity allows for extended working time
- Low viscosity formula eliminates the need for use of a vacuum chamber
- Stays cleaner longer, resulting in less maintenance and faster pulls
- Scalable for consistent results in large or small scale applications

	Product Name	Shore A Hardness ASTM D2240	A:B Mix Ratio by Volume	Pot Life (minutes)	Mixed Viscosity ASTM D2393	Elongation at Break ASTM D412	Tensile Strength ASTM D412	Tear Strength ASTM D624	Specific Volume (in³/lb)	Pour Thickness Minimum	Cured Color
MAX	VFI-2121 VFI-2122	25 A	1A:1B	30	1500 cps	1600%	280 psi	50 pli	27.4	1"	Blue Neutral
	VFI-2123 VFI-2124	25 A	1A:2B	20	1500 cps	1500%	500 psi	50 pli	27.0	1"	Blue Neutral
MAX	VFI-2130 VFI-2139	30 A	1A:1B	20	1500 cps	1500%	450 psi	70 pli	26.9	1"	Blue Neutral
	VFI-2131 VFI-2132	30 A	1A:1B	25	1500 cps	1600%	370 psi	65 pli	27.3	1"	Blue Neutral
MAX	VFI-2133 VFI-2134	35 A	1A:1B	20	1500 cps	1600%	650 psi	75 pli	26.9	3/4"	Blue Neutral
	VFI-2140 VFI-2149	40 A	1A:1B	20	2000 cps	950%	600 psi	80 pli	26.8	3/4"	Blue Neutral
MAX	VFI-2141 VFI-2142	40 A	1A:1B	20	2200 cps	1900%	650 psi	85 pli	27.2	3/4"	Blue Neutral
	VFI-2143 VFI-2144	45 A	1A:1B	20	2000 cps	1200%	750 psi	115 pli	26.7	3/4"	Blue Neutral
MAX	VFI-2151 VFI-2152	50A	1A:1B	20	2500 cps	1220%	805 psi	105 pli	27.3	1/2"	Blue Neutral
	VFI-2153 VFI-2154	55 A	1A:1B	15-20	2000 cps	1300%	750 psi	125 pli	26.8	1/2"	Blue Neutral
MAX	VFI-2163 VFI-2164	60 A	1A:1B	15-20	2000 cps	1250%	1100 psi	150 pli	26.9	1/2"	Blue Neutral

*Demold time is 16 hours unless otherwise specified

**Shrinkage values < 0.0010 in/in unless otherwise specified

TYPICAL USAGE BY DUROMETER

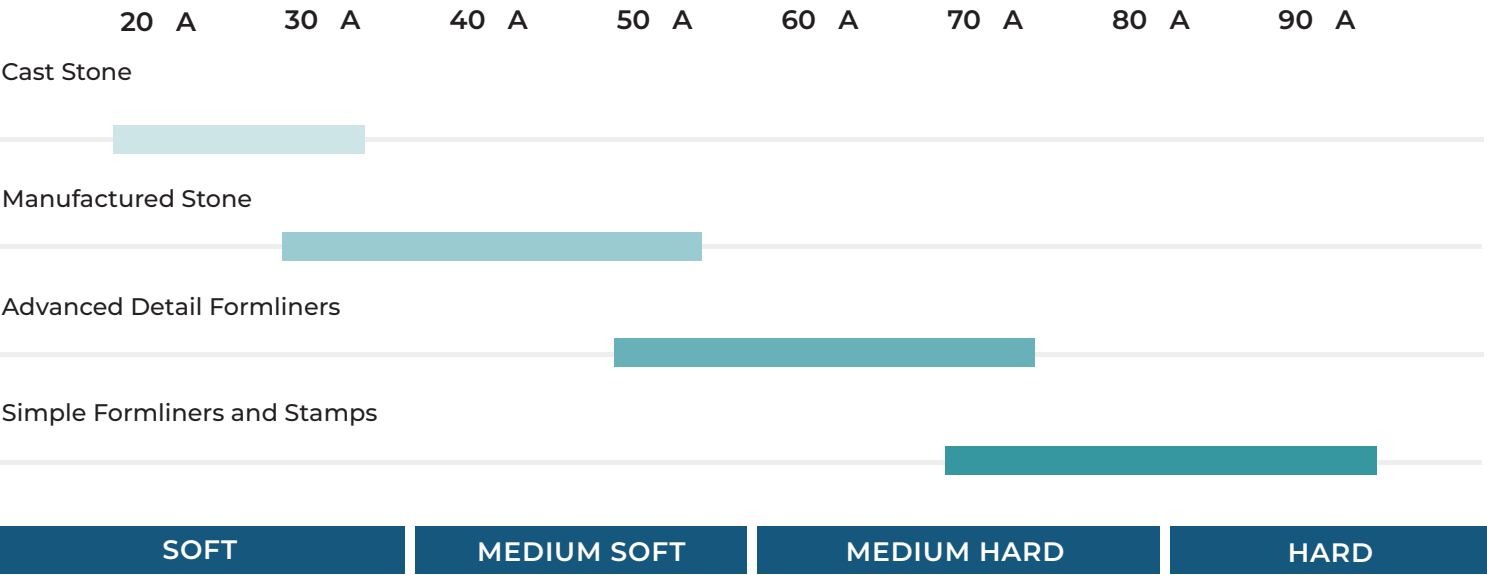

Toll-Free 800-307-9218 | volatilefree.com | info@volatilefree.com

This information and technical advice provided herein are believed to be reliable and accurate to the best knowledge of Volatile Free, Inc. As based on tests and should serve only as a recommendation. As the manufacturer, Volatile Free, Inc makes no representations or warranties of any kind, expressed, implied or statutory, including but not limited to all implied warranties of merchantability or fitness for use or a particular purpose, or any other matter with respect to this product. Volatile Free, Inc makes no representations or warranties as to the results of the use of the product and assumes no obligation or liability in connection therewith. Volatile Free, Inc is not liable for any special, exemplary, punitive, incidental or consequential damages of any sort or kind from use of this product. The information provided herein is subject to change at any time without notice. Information changes may include, but are not limited to, commercial and technical changes, changes in pricing, physical characteristics and packaging.