

URETHANE RUBBER FOR MANUFACTURED & CAST STONE

Liquid urethane rubbers are ideal for making concrete molds, as they capture and reproduce fine details on castings. In addition to the standard line, Max Release formulas are also available for increased release properties to lower breakage rates.



High-Quality,
Repeatable
Results






Superior
Physical
Properties



Exceptional
Abrasion
Resistance



Versatile For
Large & Small
Projects

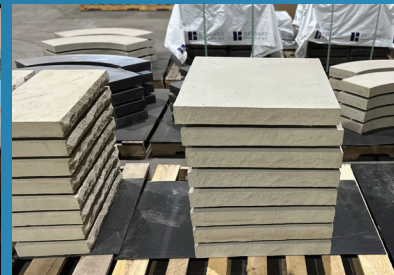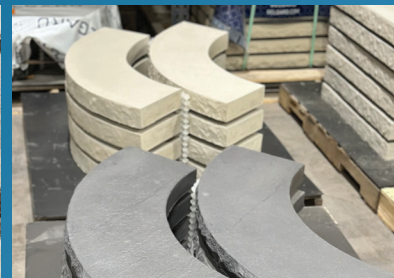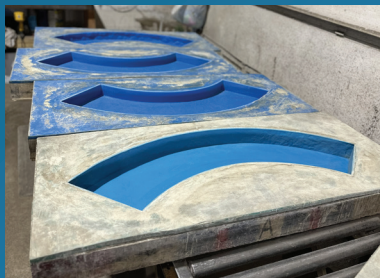

» HOW TO USE:

- **Prepare** porous molding surfaces with release and sealing agents. Measure both components by weight or volume and mix thoroughly using the double-bucket mix method before pouring into a single spot at the lowest point of the mold until the desired thickness is met.
- **Allow** the rubber to sit at room temperature for a minimum of 16 hours before demolding and wait a minimum of 3 days before use. A release agent from a reputable release company is required before casting. See individual technical data sheets for more information.



volatilefree.com



Toll-Free 800-307-9218



info@volatilefree.com